


Description of Specification

Non-Interchangeable Type


	MSA	25	A	2	SS	F0	
Series : MSA							
Size : 15, 20, 25, 30, 35, 45, 55, 65							
Carriage type : Heavy load							
A : Flange type, mounting from top							
E : Flange type, mounting either from top or bottom							
S : Square type							
Ultra heavy load							
LA : Flange type, mounting from top							
LE : Flange type, mounting either from top or bottom							
LS : Square type							
Number of carriages per rail : 1, 2, 3 ...							
Dust protection option of carriage :							
No symbol, UU, SS, ZZ, DD, KK, LL, RR, HD (refer to Dust Proof [B1-232])							
Preload : FC (Light preload) , F0 (Medium preload) , F1 (Heavy preload)							
Code of special carriage : No symbol, A, B ...							
Rail type : R (Counter-bore type), T (Tapped hole type)							
Rail length (mm)							
Rail hole pitch from start side (E1, see Fig.1)							
Rail hole pitch to the end side (E2, see Fig.1)							
Accuracy grade : N, H, P, SP, UP							
Code of special rail : No symbol, A, B ...							
Dust protection option of rail : No symbol, /CC, /MC, /MD							
(refer to Code of Contamination for Rail [B1-223])							
Number of rails per axis : No symbol, II, III, IV ...							



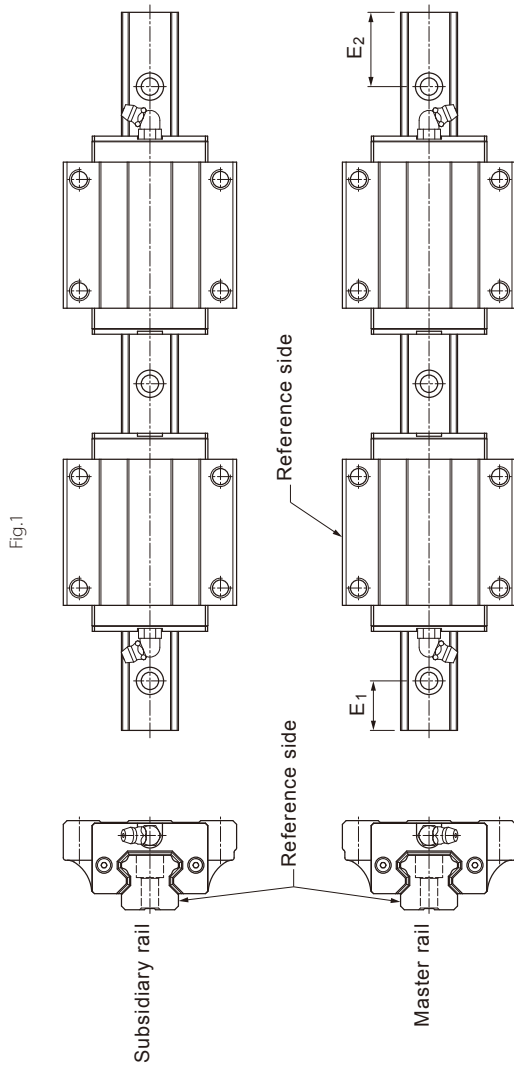

Interchangeable Type

Code of Carriage

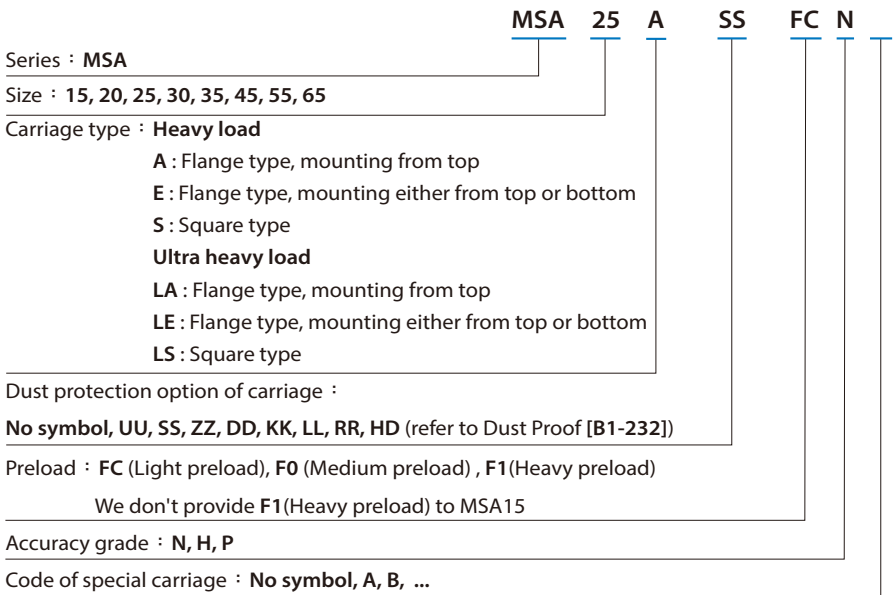

Code of Rail

