

## Description of Specification

### Non-Interchangeable Type

	MSG	27	E	2	SS	F0	
Series : <b>MSG</b>							
Size : <b>21, 27, 35</b>							
Carriage type : <b>E</b> : Flange type, mounting either from top or bottom <b>S</b> : Square type							
Number of carriages per rail : <b>1, 2, 3 ...</b>							
Dust protection option of carriage : <b>No symbol, UU, SS, ZZ, DD, KK</b> (refer to Dust Proof [B1-232])							
Preload : <b>FC</b> (Light preload) , <b>F0</b> (Medium preload) , <b>F1</b> (Heavy preload)							
Code of special carriage : <b>No symbol, A, B, ...</b>							
Rail type : <b>R</b> (Counter-bore type)							
Rail length (mm)							
Rail hole pitch from start side ( <b>E1</b> , see Fig.3)							
Rail hole pitch to the end side ( <b>E2</b> , see Fig.3)							
Accuracy grade : <b>N, H, P, SP, UP</b>							
Code of special rail : <b>No symbol, A, B ...</b>							
Dust protection option of rail : <b>No symbol, /CC, /MC, /MD</b> (refer to Code of Contamination for Rail [B1-233])							
Number of rails per axis : <b>No symbol, II, III, IV ...</b>							



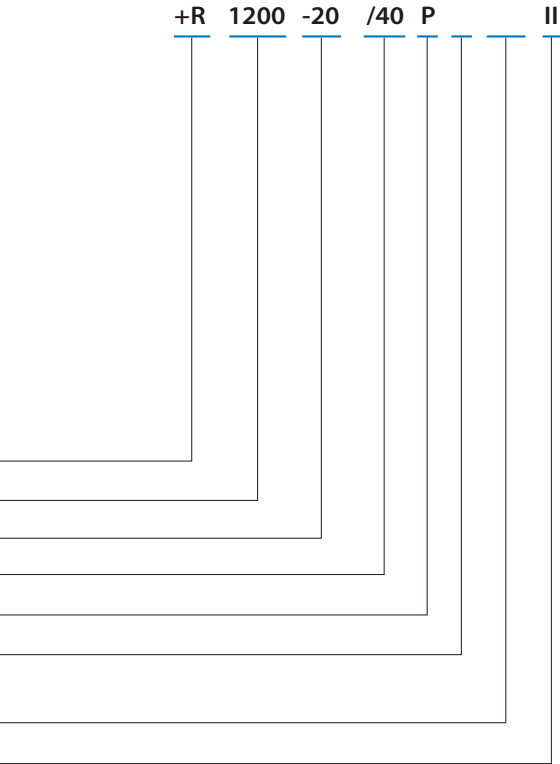


Fig.3

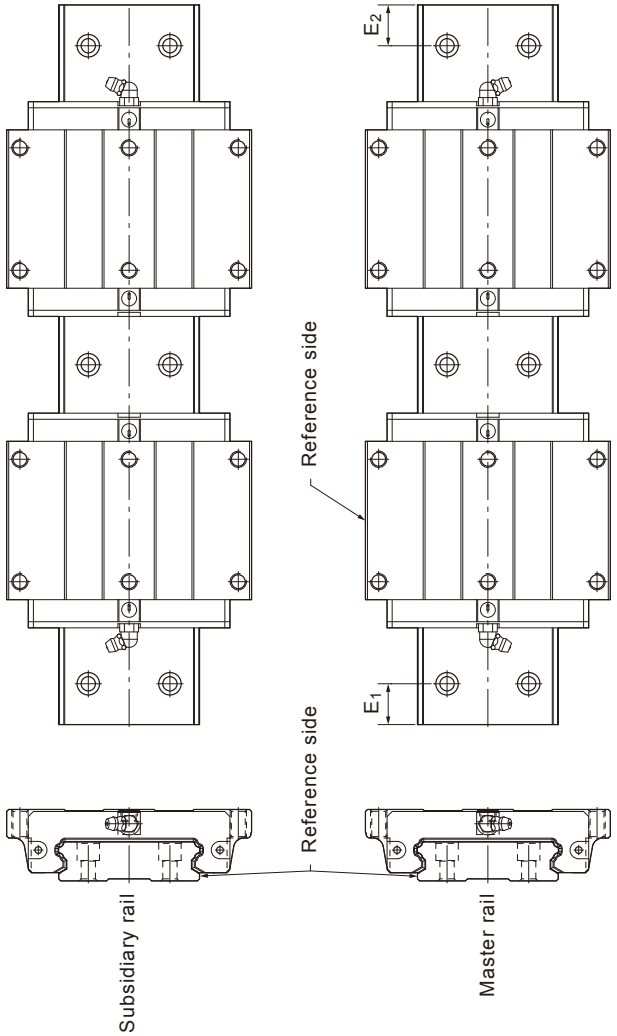

## Interchangeable Type

### Code of Carriage

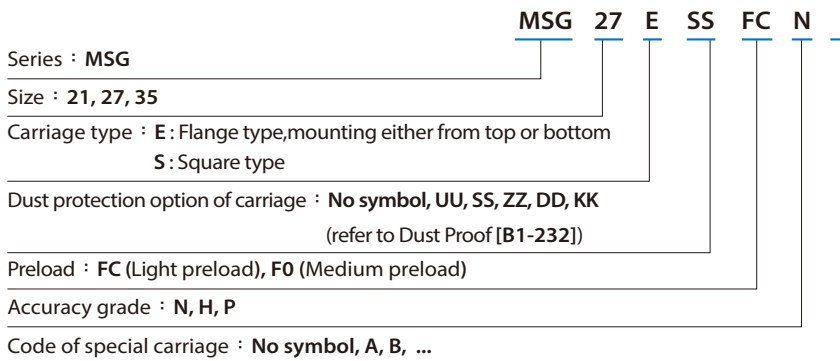

### Code of Rail

