

Non-Interchangeable Type

Unit: mm

Model No.	Item	Accuracy Grade
		Precision P
45	Difference in height H	0.012
	Perpendicularity of surface D against surface B	0.012
	Running parallelism of surface E against surface B	ΔE (see the Table 9)
	Running parallelism of surface F against surface D	ΔF (see the Table 9)

Preload Grade


Series	Preload grade		
	Light preload (FC)	Medium preload(F0)	Heavy preload(F1)
SMH45L	0.01~0.03C	0.04~0.06C	0.07~0.09C

Note: C is basic dynamic load rating in above table. Refer to the specification of products, please.

The Shoulder Height and Corner Radius for Installation

SMH series

Unit: mm

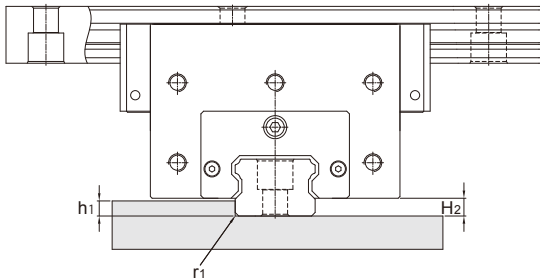

Model No.	r_1 (max.)	h_1 (max.)	H_2
45	1	8	10